

Mounting Instructions

Retrofit Brackets [Z-SMA and Z-GMA]




Replacing discontinued Belimo


When replacing an actuator, whether Belimo or other, be sure to consider the application parameters before selecting the replacement. The new product may not be the best fit for the application. Example would be a Belimo AM24 US mounted to a valve linkage. The direct replacement of the actuator is AMB24-3. However, the AM24 US and the AMB24-3 are different lengths, the linkage would need to be replaced as well.

Instead of replacing the linkage the retrofit bracket Z-SMA and Z-GMA can be used to extend the location of the anti-rotation bracket to match the location of the anti-rotation bracket of discontinued Belimo actuators.


Z-SMA for replacing AM and SM actuators
Z-GMA for replacing GM actuators

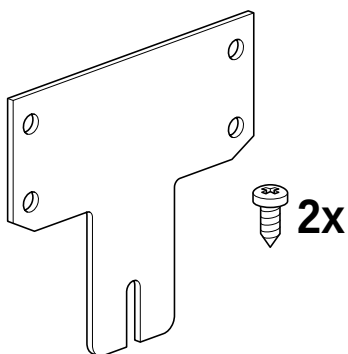

1

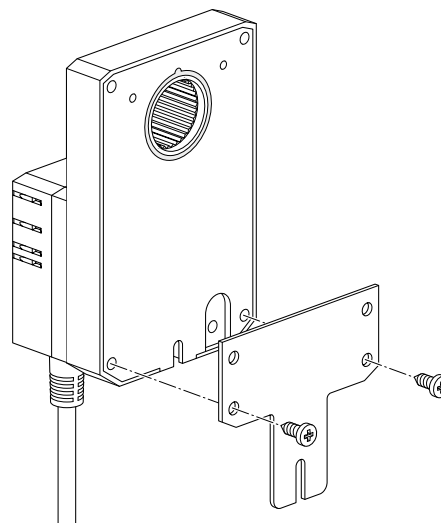

A

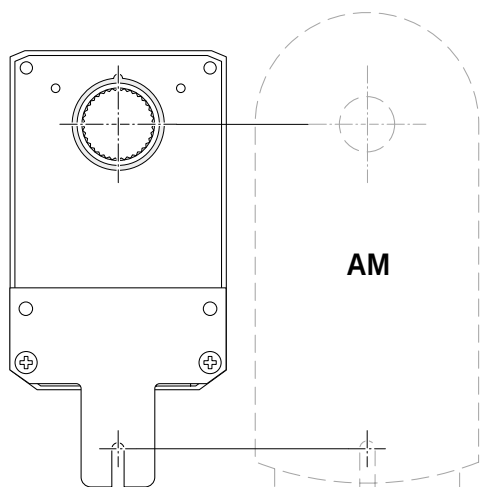

B

