



Model 008 Cartridge Circulator

The Taco 008 Cartridge Circulator is designed for quiet, efficient operation in higher-head applications for hydronic heating, radiant in-floor/panel heating, solar heating, heat recovery, water source heat pump, and domestic water recirculation systems. Its unique field-serviceable cartridge contains all moving parts. Replacing the cartridge rebuilds the circulator. With no mechanical seal, the self-lubricating, maintenance free design provides unmatched reliability. Available in Cast Iron or Stainless Steel, flanged or Low-Lead Bronze, sweat construction.



Low-Lead Bronze

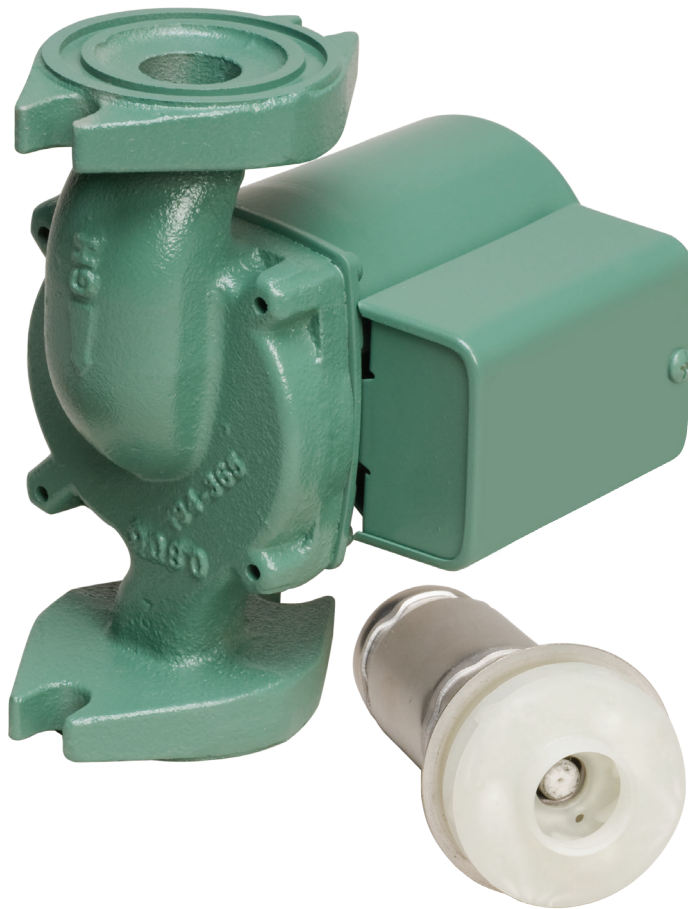

Stainless Steel



Low-Lead
Compliant



Submittal Data Information Model 008 Cartridge Circulator

Submittal Data # 101-031
Supersedes: 05/08/09

Effective: 04/15/13

Features

- Standard High Capacity Output-Compact Design
- Quiet, Efficient Operation
- Direct Drive - Low Power Consumption
- Unique Replaceable Cartridge - Field Serviceable
- Self Lubricating
- No Mechanical Seal
- Unmatched Reliability - Maintenance Free
- Universal Flange to Flange Dimensions
- Cast Iron or Stainless Steel, Flanged and Bronze, Sweat Connections

Materials of Construction

Casing (Volute):
Cast Iron, Stainless Steel or Low-Lead Bronze
Stator Housing:.....Steel
Cartridge:.....Stainless Steel
Impeller:.....Non-Metallic
Shaft:.....Ceramic
Bearings:.....Carbon
O-Ring & Gaskets:.....EPDM

Model Nomenclature

F – Cast Iron, Flanged
SF – Stainless Steel, , Flanged
BC – Bronze, 3/4" Sweat Connections

Performance Data

Max. Flow: 14 GPM
Max. Head: 15 Feet
Min. Fluid Temperature: 40°F (4°C)
Max. Fluid Temperature: 230°F (110°C)
Max. Working Pressure: 125 psi
Connection Sizes: 3/4", 1", 1-1/4", 1/2" Flanged
3/4" Sweat

Certifications & Listings

UL US LISTED FOR INDOOR USE ONLY


NSF Low-Lead Compliant
Certified to NSF/ANSI 372

Application


The Taco 008 is designed for a wide range of residential and light commercial higher-head water circulating applications. Typical uses include hydronic heating, radiant in-floor/panel heating and closed-loop solar heating systems. The Stainless Steel or Bronze 008 can be used in higher-head heat recovery, water source heat pump, open-loop solar heat and domestic water recirculation systems. The unique replaceable cartridge contains all of the moving parts and allows for easy service, instead of replacing the entire circulator. Compact, direct-drive, low power consumption design is ideal for high-efficiency jobs.

Pump Dimensions & Weights

Models	Casing	Flange Type*	A		B		C		D		F		G		Ship Wt.	
			in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	lbs.	Kg
008-F6	Cast Iron	S	6	152	4	102	3-3/16	81	2-15/16	75	4-3/4	121	6-3/8	162	8.0	3.6
008-F6-3	Cast Iron	R	5-1/2	140	4	102	3-3/16	81	2-15/16	75	4-3/4	121	6-3/8	162	8.0	3.6
008-SF6	St. Steel	S	6	152	4	102	3-3/16	81	2-15/16	75	4-3/4	121	6-3/8	162	8.0	3.6
008-SF6-2	St. Steel	R	5-1/2	140	4	102	3-3/16	81	2-15/16	75	4-3/4	121	6-3/8	162	8.0	3.6
008-BC6	Bronze	---	5-5/8	143	4-9/16	116	3-3/16	81	2-15/16	75	4-3/4	121	6-3/8	162	8.0	3.6

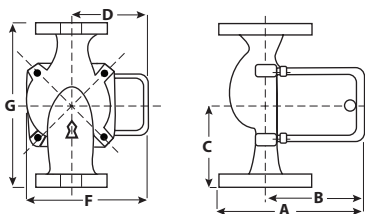

Mounting Positions

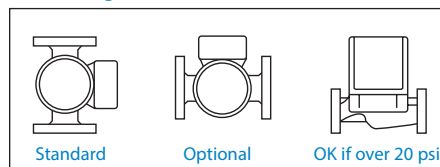


Electrical Data


Model	Volts	Hz	Ph	Amps	RPM	HP
Cast Iron	115	60	1	.79	3250	1/25
Stainless Steel/Bronze	115	60	1	.84	3250	1/25
Motor Type	Permanent Split Capacitor Impedance Protected					
Motor Options	220/50/1, 220/60/1, 230/60/1, 100/110/50/60/1					

*Flange Orientation Type

Standard (S) Rotated (R)



Performance Field - 60Hz

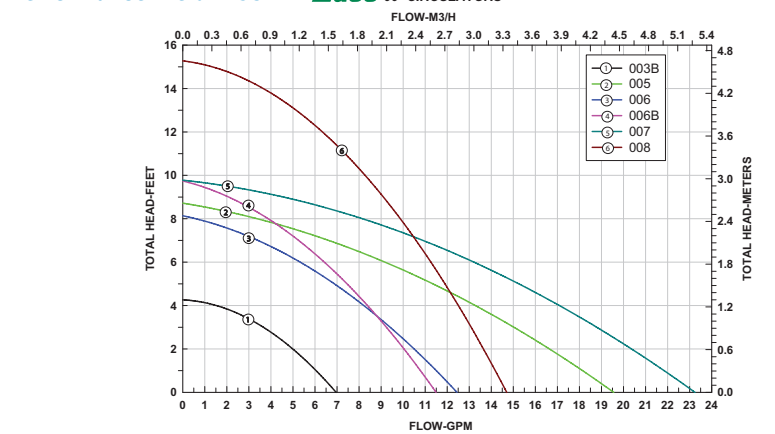

Taco
Do your best work.

Taco Inc., 1160 Cranston Street. Cranston, RI 02920 / (401) 942-8000 / Fax (401) 942-2360
Taco (Canada) Ltd., 8450 Lawson Road, Unit #3, Milton, Ontario L9T 0J8 / (905) 564-9422 / Fax (905) 564-9436
www.taco-hvac.com